

Distributed by:



www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.



LT2K33-81-UC9T

5.0MM ROUND LAMP

Features

- * LOW CURRENT REQUIREMENTS
- * HIGH LIGHT OUTPUT
- * RELIABLE AND RUGGED
- * IC COMPATIBLE

Jameco Part Number
215597

Absolute Maximum Ratings at T_A=25°C

REVERSE VOLTAGE (<100 μ A).....	4.0V
D.C. FORWARD CURRENT.....	30mA
PULSE CURRENT (1/10 DUTY CYCLE,0.1 ms PULSE WIDTH).....	100 mA
OPERATING TEMPERATURE RANGE.....	-25°C TO +85°C
STORAGE TEMPERATURE RANGE.....	-25°C TO +100°C
LEAD SOLDERING TEMP. (1.6mm FROM BODY).....	260°C FOR 5 SEC.

Eye Safety Information

These LED devices are measured to be AEL Class 2 LED Products per IEC 825-1 and CENELEC EN60825-1 Standards when operated at the maximum data sheet dc drive current. For eye safety, do not stare into the light beam of these LED devices at close range.

Electrical/Optical Characteristics at T_A=25°C

PART NUMBER	LED CHIP		LENS COLOR	WAVELENGTH TYP. I _f @20mA (nm)		FORWARD VOLTAGE @20mA(V)		LUMINOUS INTENSITY @20mA(mcd)		VIEW ANGLE 2 θ ^{1/2} (deg)
	MATERIAL	EMITTING COLOR		λ p	λ d	TYP.	MAX.	MIN.	TYP.	
LT2K33-81-UC9T	AlGaInP	YELLOW	W.C.	592 ± 5	590 ± 5	2.2	2.8	3000	5000	5


(1) LENS COLOR

(2) SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


W.C....WATER CLEAR

(3) ALL ABOVE COMPONENTS ARE CONSIDERED . DEVIATIONS FROM STATED SPECIFICATIONS WILL REQUIRE A NEW PART NUMBER BE ASSIGNED .


Package Dimensions

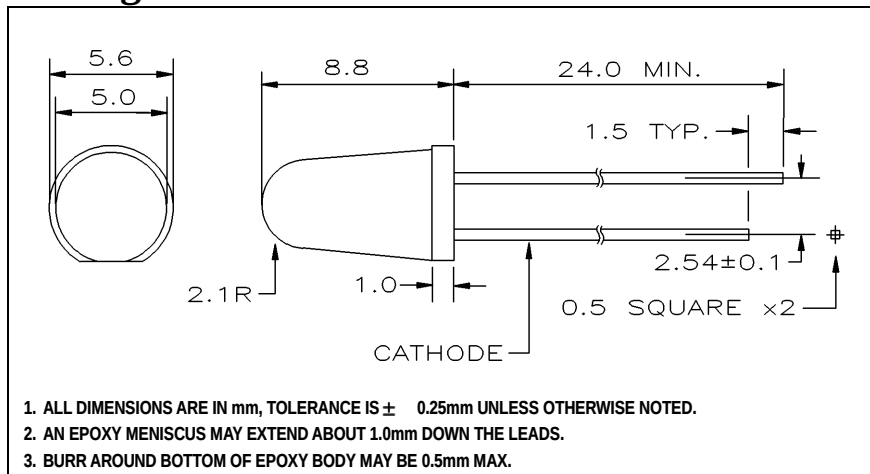


Radiation Pattern

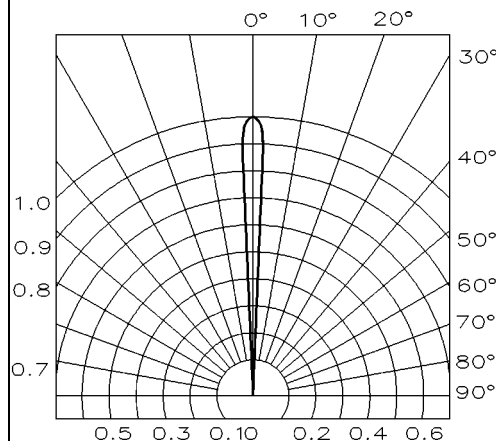


Forward Current vs. Applied Voltage

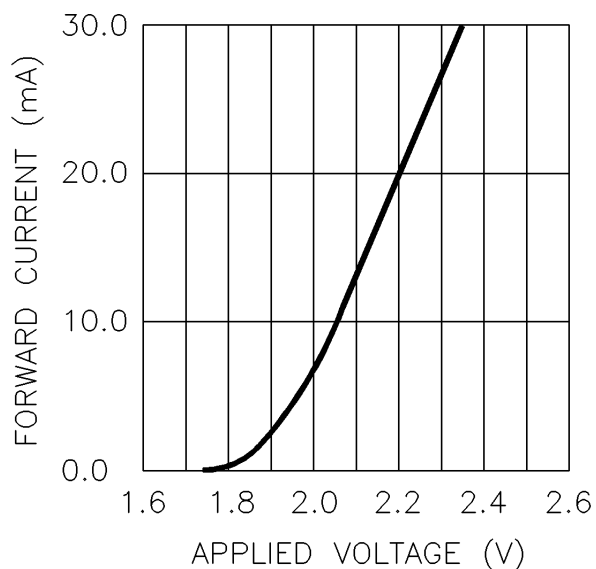

Luminous Intensity vs. Forward Current

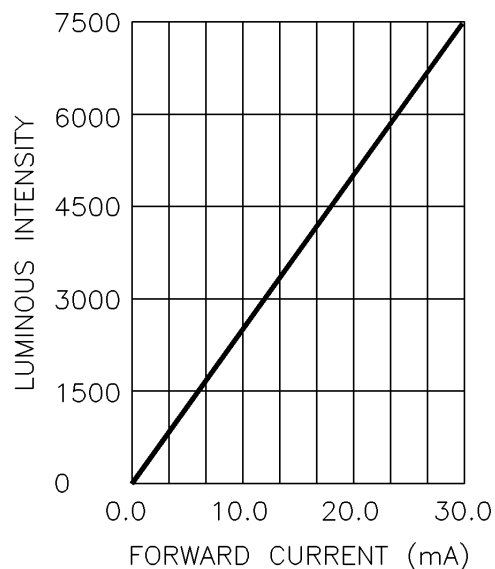

Forward Current vs. Ambient Temperature

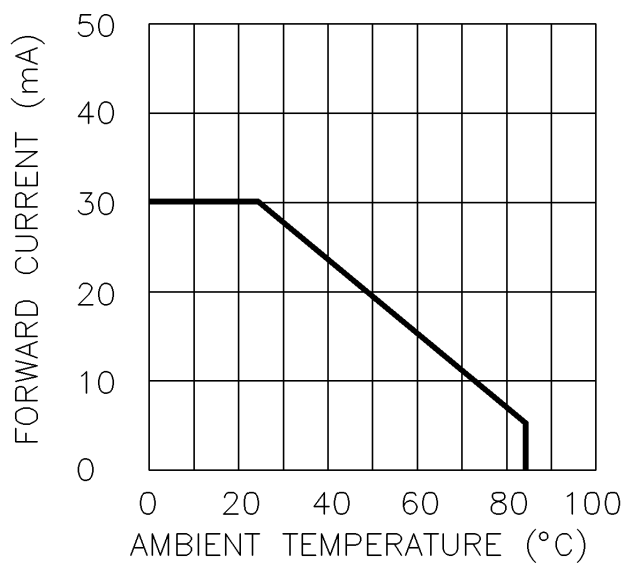

Relative Intensity vs. Wavelength

